


# INSTALLATION INSTRUCTIONS


1 x BELLATRIX
RECTANGULAR
CRUSHED CRYSTAL
PENDANT LIGHT


**CODE: SE32001W0** 



**IMPORTANT:** Please read these instructions before commencing installation and retain for future reference.

# Components Tools required

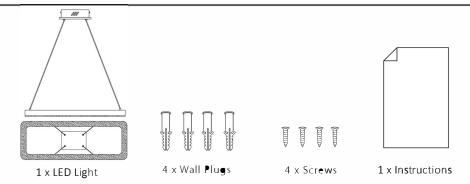



1 x Screw driver 1 x Power Drill

### **Important Safety Information**

Please read these instructions carefully before attempting to install this product. It is advisable to keep these instructions in a safe place for future reference.

We recommend that you consult a qualified electrician. All electrical installation must be carried out in accordance with current IEE wiring regulations (BS7671).

These products must not be modified, if any modification are made, it may invalidate the warranty and may render the product unsafe.

This fitting should be used indoors only.

- If in doubt installation must be carried out by a qualified electrician.
- · Install on smooth flat surface(s) only.
- Do not exceed or stretch the cable length of each LED wire.
- The wattage for this light is 33.2W.
- This light is IP44 rated and suitable for use in zone 2 areas of the bathroom.

#### Safety Instructions

- 1. Before commencing installation or maintenance, isolate the main electrical supply for the appropriate circuit at the fuse board.
- 2. This product is only suitable for connecting to a 220-240V 50Hz supply.
- 3. The lights should be mounted onto a secure surface.

4. When the lamp expires the fitting must be replaced

#### Waste Electrical & Electronic Equipment (WEEE)

The symbol on the product, or on the document accompanying the product, the crossed out wheelie bin symbol, indicates that this product may not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic waste.




Sensio House, Unit 7, Speedwell Road, Whitwood, Castleford, West Yorkshire, WF10 5PY




# 1 x BELLATRIX RECTANGULAR CRUSHED CRYSTAL PENDANT LIGHT

Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the fitting on its side on a smooth surface.




Remove the mounting bracket from the canopy by loosening the screws on the side. Use the mounting bracket as a template to mark the screw positions on the ceiling.

Install the mounting bracket onto the ceiling using the mounting screws and wall plugs provided.



Install the canopy onto the mounting bracket by tightening the screws on the side.


After installation, switch on the fitting to test.



Unscrew the metal box from the canopy. Connect the mains supply wire to the junction box. Ensure the wires are secure and no bare wires are exposed. Screw the metal box to canopy and make sure the junction box is inside the metal box.

Mains Supply Wire
Earth - Yellow/Green (#)
Neutral - Blue or Black
Live - Brown or Red

Fitting Wire
Yellow/Green or 🖺
Blue
Brown




# **ZONE**

- Inside the bath or shower.

  Must be SELV (12V max.)
  due to water submersion.
  Minimum rating of IP67.
- 225cm above the bath or shower. Minimum rating of IP44.
- The area stretching to 60cm outside the bath or shower and 60cm from water outlet of sink. An IP rating of at least IP44 is required.

The light fitting is suitable for installation in zone 2 and the outside zones.

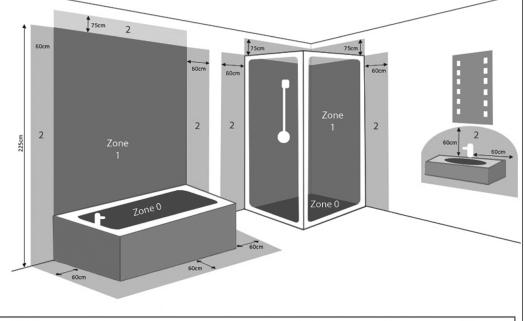

 $\textbf{OUTSIDE ZONES}. \ Anywhere \ outside \ zones \ 0, \ 1 \ \& \ 2. \ Where \ water \ jets \ are \ not \ used \ for \ cleaning \ purposes, the \ general \ rules \ of \ BS7671 \ apply.$ 

## **Maintenance & Care**

- Ensure that the power is disconnected prior to cleaning.
- To keep the finish of this product, wipe over with soft cloth periodically.
- Do not use harsh chemical solvents, this may dis-colour or damage the finish.

Sensio House, Unit 7, Speedwell Road, Whitwood, Castleford, West Yorkshire, WF10 5PY WWW.Sensio.co.uk Visit our website for online instructions.

SCISIO® furniture lighting solutions